

Simulation and Analysis of 27- Level Hybrid H-Bridge Multilevel Inverter for PV System

S.Priyanga¹, M.Valan Rajkumar², J.Chandramohan³, G.Vidhya Krishnan⁴

¹ Post-Graduate Scholar, Department of Electrical and Electronics Engineering, Gnanamani College of Technology, Namakkal, Tamilnadu, India

^{2,3} Professor, Department of Electrical and Electronics Engineering, Gnanamani College of Technology, Namakkal, Tamilnadu, India

⁴ Assistant Professor, Department of Electrical and Electronics Engineering, Gnanamani College of Technology, Namakkal, Tamilnadu, India

Abstract – In this paper, photovoltaic array and hybrid H-bridge multilevel inverter is studied and new model is simulated to prove the performance of the PV system and decrease the complexity and total cost of the inverter. A hybrid H-bridge multilevel inverter is preferred over all other topologies as it requires less number of switches by which high number of voltage levels is obtained and also reduced THD. Here simulated output is analyzed to improve the performance of inverter with 27 level. The modeling and simulation for the above systems is performed in MATLAB and the generated output voltage is analyzed.

Index Terms – Photovoltaic array, Multi-level inverter, Pulse width modulation, Simulink, MATLAB.

1. INTRODUCTION

Photovoltaic (PV) power generation has an important role to play due to the fact that it is a green source. The only emissions associated with PV power generation are those from the production of its components. After their installation they generate electricity from the solar irradiation without emitting greenhouse gases. In their lifetime, which is around 25years, PV panels produce more energy than that for their manufacturing. The efficiency of a PV plant is affected mainly by three factors: the efficiency of the PV panel (in commercial PV panels it is between (8-15%)), the efficiency of the inverter (95-98 %) and the efficiency of the *maximum power point tracking* (MPPT) algorithm (which is over 98%). Improving the efficiency of the PV panel and the inverter is not easy as it depends on the technology available, it may require better components, which can increase drastically the cost of the installation. Instead, improving the tracking of the *maximum power point* (MPP) with new control algorithms is easier, not expensive and can be done even in plants which are already in use by updating their control algorithms, which would lead to an immediate increase in PV power generation and consequently a reduction in its price [1-15].

The multilevel inverter has gained much attention in recent years due to its advantages in high power possibility with low switching frequency and low harmonics. The general function of the multilevel inverter is to synthesize a desired high voltage

from several levels of DC voltages. The dc sources can be batteries, fuel, cells, etc. In the hybrid topologies, the degrees of dc voltage sources are unequal or altered dynamically depending upon the need. These converters are very capable in the size and cost and improve the reliability since less number of semiconductors and capacitor are used in this topology [13-35]. The hybrid multilevel converters consist of altered multilevel topologies which are having uneven value sources of dc voltage magnitude and different modulation techniques. With appropriate mixture of switching devices and technique, the converter cost is reduced. The advancement in the pitch of power electronics and microelectronics made it probable to reduce the degree of harmonics with multilevel inverters, in which the number of levels of the inverters are increased fairly than increasing the size of the filters. The performances of multilevel inverters enhance as the number of levels of the inverter increases. Therefore by interfacing both PV array and multisource inverter, the output AC sinusoidal voltage waveform with higher number of levels can be obtained and used for high power applications. This interfaced circuit is modeled and analyzed using SIMULINK in MATLAB.

2. PHOTO-VOLTAIC ARRAY

Solar Array or Photo voltaic array is a system made up of a group of solar panels connected together. A photovoltaic array is therefore multiple solar panels electrically wired together to form a much larger PV installation (PV system) called an array, and in general the larger the total surface area of the array, the more solar electricity it will produce.

A complete photovoltaic system uses a photovoltaic array as the main source for the generation of the electrical power supply. The amount of solar power produced by a single photovoltaic panel or module is not enough for general use. Most manufactures produce standard PV panels with an output voltage of 12V or 24V. By connecting many single PV panels in series (for a higher voltage requirement) and in parallel (for a higher current requirement) the PV array will produce the desired power output.

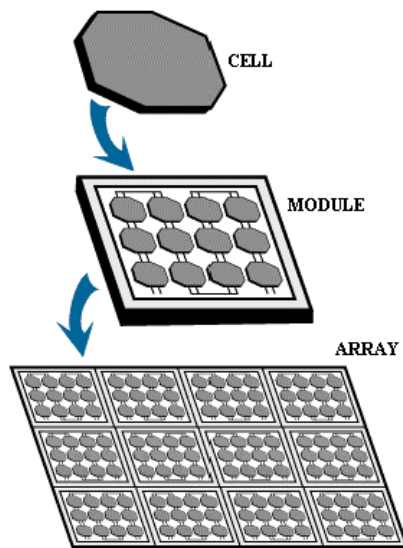


Figure 1: A Photovoltaic solar array

2.1 Electrical characteristics of PV Array

The electrical parameters on which PV array finds the relationship between output current and voltage are

- V_{OC} (open -circuit voltage)
- I_{SC} (Short-circuit current)
- P_{max} (Maximum power point)
- FF (Fill factor)
- %eff(percent efficiency)

V_{OC} (open-circuit voltage) is the maximum voltage that the array provides when the terminals are not connected to any load (an open circuit condition). This value is much higher than V_{max} which relates to the operation of the PV array which is fixed by the load. This value depends upon the number of PV panels connected together in series. I_{SC} (short-circuit current) is the maximum current provided by the PV array when the output connectors are shorted together (a short circuit condition). This value is much higher than I_{max} which relates to the normal operating circuit current. P_{max} maximum power point which relates to the point where the power supplied by the array that is connected to the load (batteries, inverters) is at its maximum value,

where $P_{max} = I_{max} \times V_{max}$.

The maximum power point of a photovoltaic array is measured in Watts (W) or peak Watts (W_p). FF (fill factor) is the relationship between the maximum power that the array can actually provide under normal operating conditions and the product of the open-circuit voltage times the short-circuit current, ($V_{OC} \times I_{SC}$). This fill factor value gives an idea of the quality of the array and the closer the fill factor is to 1 (unity),

the more power the array can provide. Typical values are between 0.7 and 0.8. The %eff (percent efficiency) is the efficiency of a photovoltaic array is the ratio between the maximum electrical power that the array can produce compared to the amount of solar irradiance hitting the array. The efficiency of a typical solar array is normally low at around 10-12%, depending on the type of cells (Monocrystalline, Polycrystalline, Amorphous or Thin film) being used. Photovoltaic I-V characteristics curves provide the information designers need to configure systems that can operate as close as possible to the maximum peak power point. The peak power point is measured as the PV module produces its maximum amount of power when exposed to solar radiation equivalent to 1000 watts per square meter, 1000 W/m^2 or 1 kW/m^2 .

3. TYPES OF MULTILEVEL INVERTER

3.1. Cascaded H-bridge multilevel inverter

The general structure of the cascaded multilevel inverter for single phase is shown in figure 6. Each of the separate voltage source (V_{dc1} , V_{dc2} , V_{dc3}) connected in cascade with other sources via a special H-bridge circuit associated with it. Each of the circuit consists of four active switching elements that can make the output voltage source in positive or negative polarity; or it can be simply zero volts depending on the switching condition of the switches in the circuit. A conventional multilevel power inverter topology employs multiple/link voltage of equal magnitudes. It is fairly easy to generalize the number of distinct levels [20-40].

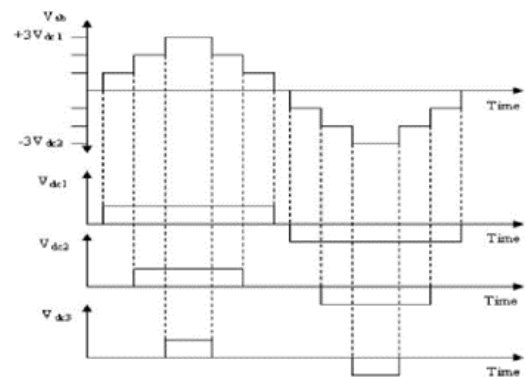


Figure 3: Typical Output Waveform for Cascaded H-Bridge Multilevel Inverter

3.2. Hybrid H-bridge Multi-level inverter

The general structure of the new hybrid multilevel inverter is in figure 10, each of the separate voltage source (V_1 , V_2 , V_3) connected in cascaded with other sources via a special H-bridge circuit associated with it. Each of the circuit consists of four active switching elements that can make the output voltage source in positive or negative polarity; or it can be simply zero volts depending on the switching condition of the switches in the circuit. The main advantages of hybrid multilevel inverter

are high number of levels with reduced number of bridges and dc sources.

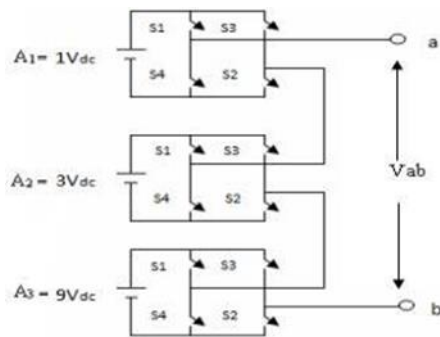


Figure 4: Hybrid H-Bridge Multilevel Inverter

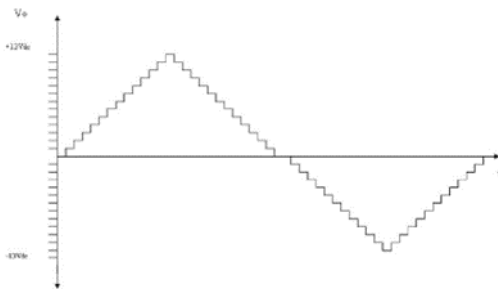


Figure 5: Typical output waveform for Hybrid H-Bridge Multilevel Inverter

4. MODELING AND SIMULATION RESULTS

For each full bridge inverter the output voltage is given by

$$V_{oi} = V_{dc} (S_{1i} - S_{2i})$$

and the input DC current is,

$$I_{dci} = I_a (S_{1i} - S_{2i})$$

$i=1,2,3,\dots$ (number of full bridge inverters employed). I_a is the output current of the new hybrid inverter. S_{1i} and S_{2i} is the upper switch of each full bridge inverter. A single phase output voltage of proposed inverter is given by

$$V_{on} = \sum_{i=1}^n V_{oi}$$

The topology of the proposed DC-AC H-bridge multilevel inverter is shown in Fig.4. The inverter uses a standard three - leg inverter and an H-bridge with its DC source in series with each phase leg. To see how the system operates, consider simplified single phase topology, shown in Fig.4. The output voltage v_1 (3v) of this first leg of the top inverter is goes to ON state. For a negative half cycle this leg is connected in series with a full H-bridge, which, in turn, is supplied by a supply voltage. If the supply is kept charged to $V_{dc}/2$, then the output

voltage of the H-bridge can take on the values $+V_{dc}/2$. When the output voltage $v = v_1 + v_2 + v_3$ is required to be zero, one can either set

$$v_1 = +V_{dc}/2 \text{ and } v_2 = +V_{dc}/2 \text{ and } v_3 = -V_{dc}/2 \text{ (or)}$$

$$v_1 = -V_{dc}/2 \text{ and } v_2 = +V_{dc}/2 \text{ and } v_3 = +V_{dc}/2$$

In general there are two modulation control schemes, it will be used for multilevel inverter they are fundamental switching frequency and high switching frequency Pulse Width Modulation. In this proposed paper, the simulation model based on the MATAB/SIMULINK and the model is developed under the high switching frequency SPWM. It has triangle carrier signal, one carrier signal for each level and it has one reference or modulation, signal for a single phase. Pulse width modulation technique as a good control strategy because it as an ability to control the fundamental voltage and the harmonic contents. The main aim of this technique is used to minimize the distortion in the output voltage and thereby increasing the efficiency.

$$PWM(a) = (-1)^j + 1 V_m / 3\pi [\sin((2K - \pi/m)\sin\delta)].$$

The firing pulse generated to approach a better efficiency and thereby reducing the total harmonic distortion. In future this various switching technique can be used to generate firing pulse and this can overcome the distortion problems in the output side.

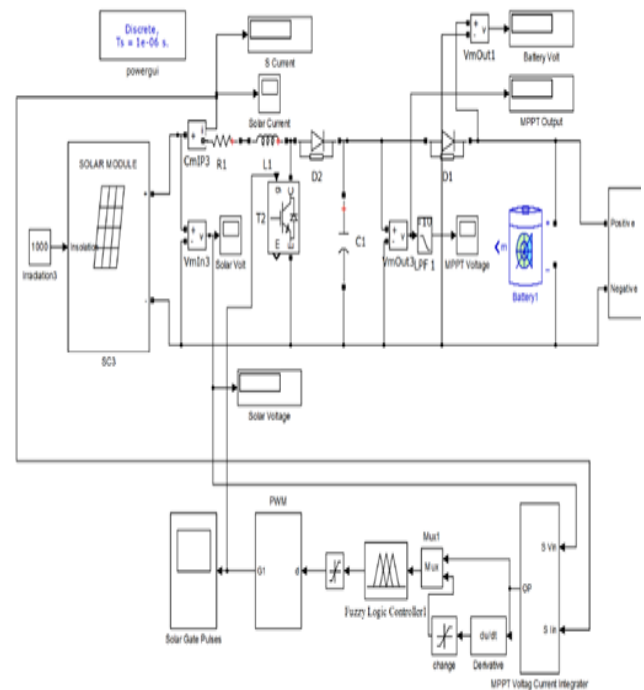


Figure 5: Simulink model for PV system using MPPT technique

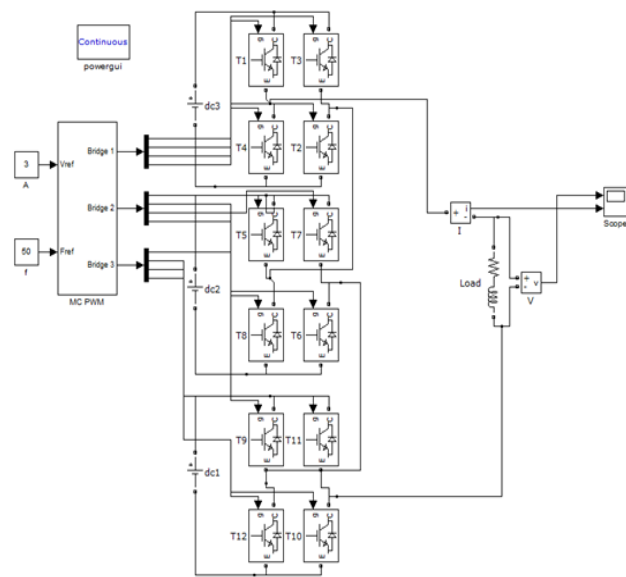


Figure 6: Simulink model for Hybrid H-Bridge Multilevel Inverter with 27 levels

5. RESULTS AND DISCUSSIONS

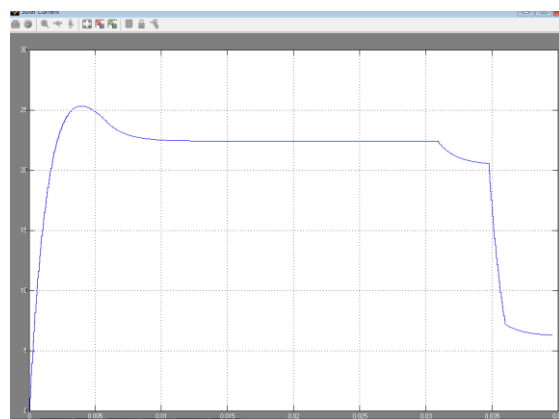


Figure 7: Output of Solar Current

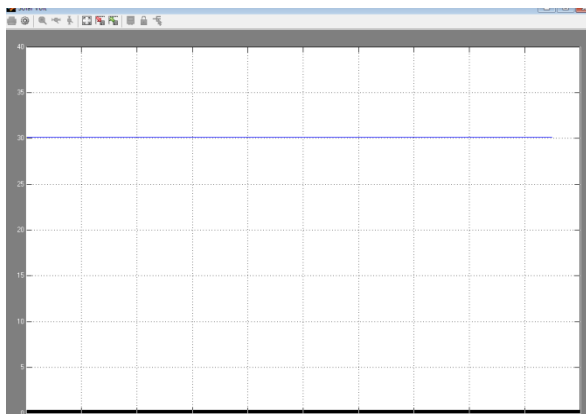


Figure 8: Output of Solar Voltage

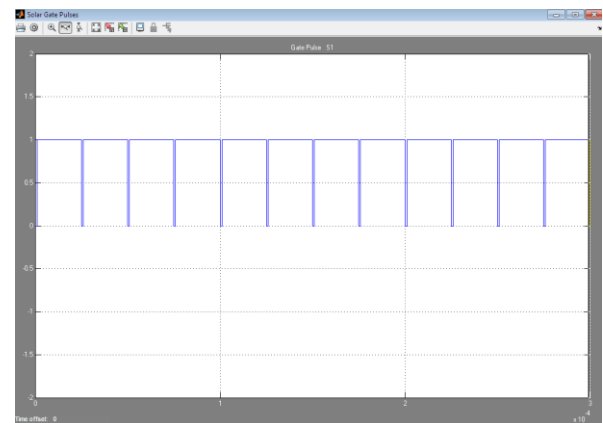


Figure 9: MPPT Gate Pulse

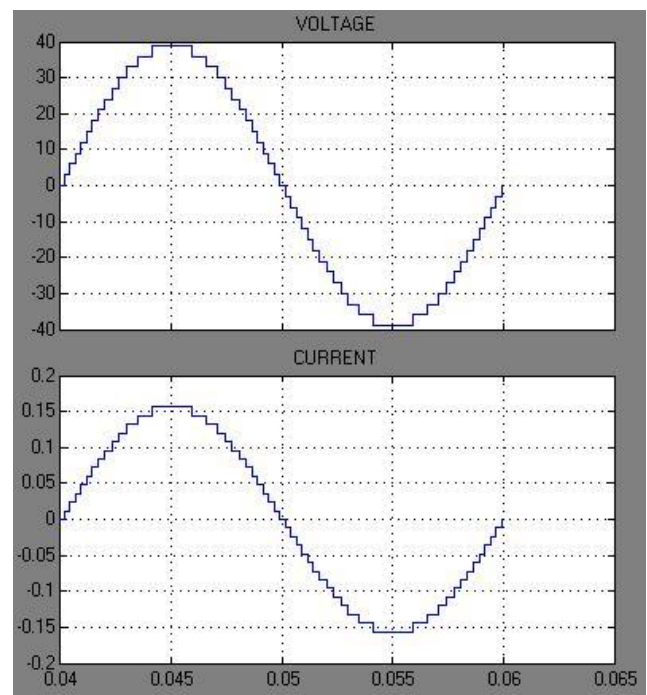


Figure 10: Output of Hybrid H-bridge inverter for 27 levels

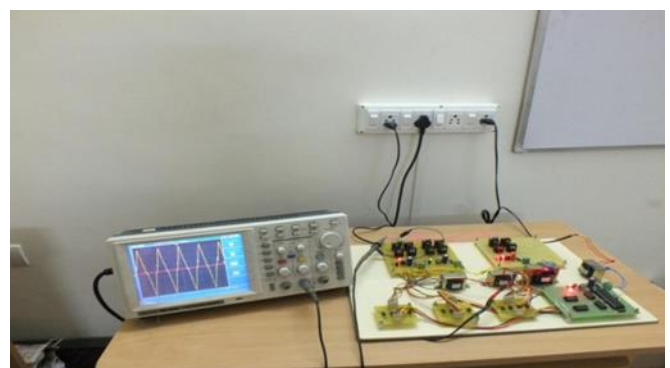


Figure 11: Hardware setup for 27 Multilevel Inverter

6. CONCLUSION

Thus modeling and analysis is performed for multilevel inverter with 27 levels by obtaining the maximum power from PV system and thereby designing the system with reduced number of switches and complexity. The simulated output step signal forms sinusoidal waveform with less number of harmonics. The high efficiency inverter output can be used for various applications like induction motor, Brushless DC motor etc. The hardware setup for 27 level multilevel inverter is shown and output obtained is a sinusoidal wave with lesser harmonics.

REFERENCES

- [1] M.ValanRajkumar, P.S.Manoharan, Modeling and Simulation of Three-phase DCMLI using SVPWM for Photovoltaic System, Springer Lecture Notes in Electrical Engineering, under the volume titled "Power Electronics & Renewable Energy Systems", Volume 326, Chapter No 5, January 2015, Pages 39-45.
- [2] M.ValanRajkumar, P.S.Manoharan, Harmonic Reduction of Fuzzy PI Controller based Three-Phase Seven-level DCMLI with SVPWM for Grid Connected Photovoltaic System, Journal International Review on Modeling and Simulations, Volume 6, No 3, June 2013, Pages 684-692.
- [3] A.Ravi, P.S.Manoharan, M.ValanRajkumar, "Harmonic Reduction of Three-Phase Multilevel Inverter for Grid connected Photovoltaic System using Closed Loop Switching Control", Journal-IREMOS, Volume 5, No 5, October 2012, Pages 1934-1942. ISSN: 1974-9821 (Print), 1974-982X (Online)
- [4] P.Thirumurugan, P.S.Manoharan, M.ValanRajkumar, "VLSI Based Inverter Switching Control" in the proceedings of International Conference on Mathematical Modeling and Applied Soft Computing MMASC'12 – Coimbatore Institute of Technology on July 2012, Vol-2 (Page):965-973.
- [5] C.Hemalatha, M.Valan Rajkumar, G.Vidhya Krishnan, "Simulation and Analysis for MPPT Control with Modified firefly algorithm for photovoltaic system", International Journal of Innovative Studies in Sciences and Engineering Technology, Volume 2, No 11, Nov.2016, Pages 48-52.
- [6] G.Vidhya Krishnan, M.Valan Rajkumar, C.Hemalatha, "Modeling and Simulation of 13-level Cascaded Hybrid Multilevel Inverter with less number of Switches", International Journal of Innovative Studies in Sciences and Engineering Technology, Volume 2, No 11, Nov.2016, Pages 43-47.
- [7] M.ValanRajkumar, P.S.Manoharan, FPGA Based Multilevel Cascaded Inverters with SVPWM Algorithm for Photovoltaic system, Elsevier Journal Solar Energy, Volume 87, Issue 1, January 2013, Pages 229-245.
- [8] M.ValanRajkumar, P.S.Manoharan, Space Vector Pulse Width Modulation of Three-Phase DCMLI with Neuro-Fuzzy MPPT for Photovoltaic System, World Journal of Modelling and Simulation, Volume 10, No 3, August 2014, Pages 193-205.
- [9] M.Valan Rajkumar, Prakasam, P. and Manoharan, P.S. (2016) Investigational Validation of PV Based DCDMLI Using Simplified SVM Algorithm Utilizing FPGA Tied with Independent Sources. Circuits and Systems, Volume 7, No 11, 3831-3848. <http://dx.doi.org/10.4236/cs.2016.711320>
- [10] P.Thirumurugan, P.S.Manoharan, M.ValanRajkumar, VLSI Based Space Vector Pulse Width Modulation Switching Control in the proceedings of IEEE International Conference on Advanced Communication Control and Computing Technologies ICACCCT 2012 on August 2012, ISBN No. 978-1-4673-2045-0 (Print) (Page):366-370.
- [11] M.ValanRajkumar, P.S.Manoharan, "Modeling, Simulation and Harmonic Reduction of Three-Phase Multilevel Cascaded Inverters with SVPWM for Photovoltaic System", Journal International Review on Modeling and Simulations, Volume 6, No. 2, April 2013, Pages 342-350. ISSN: 1974-9821 (Print), 1974-982X (Online)
- [12] M.Valan Rajkumar, G.Ranjitha, M.Pradeep, Mohammad Fasil PK, R.Sathishkumar, "Fuzzy based Speed Control of Brushless DC Motor fed Electric Vehicle", International Journal of Innovative Studies in Sciences and Engineering Technology (IJISSET), Volume: 3, Issue: 3, March 2017, Pages 12-17. ISSN: 2455-4863 (Online).
- [13] M.Valan Rajkumar, J.Chandramohan, D.Aravind, M.Basker, "Performances Analysis of Power Factor Correction for PWM Control based Bridgeless Cuk Rectifier with Positive Output Voltage", International Journal of Emerging Technologies in Engineering Research (IJETER), Volume: 5, Issue: 4, April 2017, Pages 116-121. ISSN: 2454-6410 (Online).
- [14] K.Aswini, K.Nandhini, SR.Nandhini, G.Akalya, B.Rajeshkumar, M.Valan Rajkumar, "Simulation and Analysis of ASCAD Multilevel Inverter with SPWM for Photovoltaic System", International Journal of Innovative Studies in Sciences and Engineering Technology (IJISSET), Volume: 3, Issue: 4, April 2017, Pages 1-9. ISSN: 2455-4863 (Online).
- [15] M.Valan Rajkumar, M.Mahakumar, M.Manojkumar, M.Hemaraaj, E.Kumaravel, "Modelling and Analysis of DC-DC Converter with Various MPPT Algorithms for PV System", International Journal of Innovative Studies in Sciences and Engineering Technology (IJISSET), Volume: 3, Issue: 4, April 2017, Pages 17-22. ISSN: 2455-4863 (Online).
- [16] M.Valan Rajkumar, T.Indumathi, "Analysis of Low Power Multi-core Embedded Management for Energy Harvesting", IOSR-Journal of Electrical and Electronics Engineering, Volume 12, Issue 2, Ver. II, March-April 2017, Pages 25-33. ISSN: 2320-3331 (Print) 2278-1676 (Online).
- [17] A.Ravi, M.Valan Rajkumar, P.S.Manoharan, "Harmonic Reduction of Three-Phase Eleven-level DCMLI with Fuzzy MPPT for Grid Connected Photovoltaic System", International Journal of Applied Engineering Research (IJAER), Volume 10, No 2, 2015, Pages 3251-3268. ISSN: 0973-4562 (Print).
- [18] M.Valan Rajkumar, J.Karthikeyan, P.S.Manoharan, "Modeling and Simulation of Multiphase DCMLI with SVPWM for Photovoltaic System", International Journal of Applied Engineering Research (IJAER), Special Issue: Volume 9, No 24, 2014, Pages 8477-8483. ISSN: 0973-4562 (Print).
- [19] M.ValanRajkumar, P.S.Manoharan, "Modeling and Simulation of Five-level Five-phase Voltage Source Inverter for Photovoltaic Systems", Journal Przegląd Elektrotechniczny, Volume 10, No. 10, October 2013, Pages 237-241. ISSN: 0033-2097 (Print)
- [20] M.Valan Rajkumar, P.S.Manoharan, A.Ravi, "Simulation and an Experimental Investigation of SVPWM Technique on a Multilevel Voltage Source Inverter for Photovoltaic Systems", Elsevier International Journal of Electrical Power and Energy Systems, Volume 52, Issue 9, November 2013, Pages 116-131. ISSN: 0142-0615 (Print), 1879-3517 (Online)
- [21] SR.Nandhini, G.Akalya, K.Aswini, K.Nandhini, M.Valan Rajkumar, B.Rajeshkumar, "A New Topology of H-bridge based Multilevel Inverter for PV System with Reduced Switches", International Journal of Emerging Technologies in Engineering Research (IJETER), Volume: 5, Issue: 4, April 2017, Pages 60-68. ISSN: 2454-6410 (Online).
- [22] M.Valan Rajkumar, M.Mahakumar, M.Manojkumar, M.Hemaraaj, E.Kumaravel, "A New DC-DC Converter Topology with Grey Wolf MPPT Algorithm for Photovoltaic System", International Journal of Emerging Technologies in Engineering Research (IJETER), Volume: 5, Issue: 4, April 2017, Pages 54-59. ISSN: 2454-6410 (Online).
- [23] S.Rashini, P.S.Manoharan, M.Valan Rajkumar, "Interfacing PV system to the Utility Grid using a Voltage Source Inverter", Journal of Emerging Technologies Electrical Engineering, Special Issue- ICBDM 2013, Volume 1, No 1, March 2013, Pages 124-129. ISSN: 0973-2993 (Print)

- [24] S.Sathyaraj, M.Valan Rajkumar, J.Chandramohan, "Modeling and Simulation of Asymmetric Cascaded Multilevel Inverter with Reduced Switches using Multicarrier PWM Control", International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering (IJAREEIE), Volume 5, Issue 10, October 2016, Pages 8064-8071. ISSN: 2320-3765 (Print), 2278-8875 (Online)
- [25] G.Ranjitha, M.Valan Rajkumar, "Implementation of Genetic Algorithm based Maximum Power Point Tracking for Photovoltaic System", International Journal of Innovative Research in Science, Engineering and Technology (IJIRSET), Volume 5, Issue 11, November 2016, Pages 18860-18868. ISSN: 2347-6710 (Print), 2319-8753 (Online)
- [26] S.Sathishkumar, M.Valan Rajkumar, R.Yuvaraj, "Modeling and Analysis of Soft-Switched Interleaved Boost Converter for Photovoltaic System", International Journal for Science and Advance Research in Technology (IJSART), Volume 2, Issue 11, November 2016, Pages 43-48. ISSN: 2395-1052 (Online)
- [27] M.Sundaraperumal, M.Valan Rajkumar, A.Venkatesh, "Modeling and Analysis of Current Source Multilevel Inverter using PI Controllers with Multicarrier PWM Technique", International Journal for Science and Advance Research in Technology (IJSART), Volume 2, Issue 11, November 2016, Pages 275-280. ISSN: 2395-1052 (Online)
- [28] R.Yuvaraj, S.Sathishkumar, M.Valan Rajkumar, "Analysis of PV based Soft Switching Boost DC-DC Converter with Zero Current Switching Technique", International Journal of Advanced Research in Management, Architecture, Technology and Engineering (IJARMATE), Volume 2, Issue 12, December 2016 Pages 1-5. ISSN: 2454-9762 (Print) 2454-9762 (Online)
- [29] M.Valan Rajkumar, M.Mahakumar, M.Manojkumar, M.Hemaraaj, E.Kumaravel, "A New MPPT design using Grey Wolf Optimization Techniques with DC-DC Converter for PV System", International Journal for Science and Advance Research in Technology (IJSART), Volume 3, Issue 3, March 2017, Pages 829-835. ISSN: 2395-1052 (Online)
- [30] K.Nandhini, SR.Nandhini, G.Akalya, K.Asmini, M.Valan Rajkumar, B.Rajeshkumar, "Implementation of 21-level Asymmetrical Cascaded Multilevel Inverter with Reducing Number of Switches", International Journal for Science and Advance Research in Technology (IJSART), Volume 3, Issue 3, March 2017, Pages 809-818. ISSN: 2395-1052 (Online)
- [31] S.Sathishkumar, M.Valan Rajkumar, S.Vinothkumar, M.Maruthamuthu, A.Sounder, A.Kumaresan, "A New Design for DC-DC Converter Topology with MISO for Renewable Energy Resources", International Journal of Emerging Technologies in Engineering Research (IJETER), Volume: 5, Issue: 4, April 2017, Pages 143-149. ISSN: 2454-6410 (Online)
- [32] M.Valan Rajkumar, M.Mahakumar, M.Manojkumar, M.Hemaraaj, E.Kumaravel, "Implementation of Various MPPT Algorithms with SEPIC Converter for PV System", International Journal of Engineering Research & Technology-Special Issue 2017, Volume 5, Issue 13, 2017, Pages 589-593. ISSN: 2278-0181 (Print)
- [33] G.Akalya, K.Asmini, K.Nandhini, SR.Nandhini, M.Valan Rajkumar, B.Rajeshkumar, "Modelling and Analysis of Multilevel Inverter for Photovoltaic System", International Journal of Advanced Research Methodology in Engineering & Technology (IJARMET), Volume 1, Issue 3, May 2017, Pages 36-43. ISSN: 2456-6446 (Online)
- [34] Mohammad Fasail PK, M.Pradeep, R.Sathishkumar, G.Ranjitha, M.Valan Rajkumar, "Speed Control BLDC Motor using Fuzzy Logic and PID Controller fed Electric Vehicle", South Asian Journal of Engineering and Technology, Volume 3, Issue 3, March 2017, Pages 118-131. ISSN: 2454-9614 (Print)
- [35] Y. Hao, Z. Fang, Z. Yanjun, L. Yu, Z. Wenda, C. Wenjie, and L. Jinjun, "A Source-Current-Detected Shunt Active Power Filter Control Scheme Based on Vector Resonant Controller," Industry Applications, IEEE Transactions on, vol. 50, no. 3, pp. 1953-1965, 2014.
- [36] P.Pushparani, M.Valan Rajkumar, R.Suganya, "Simulation and Analysis of SVM Technique for DCMLI under Transient Conditions with Non-Linear Loads", International Journal of Emerging Technologies in Engineering Research (IJETER), Volume: 5, Issue: 11, November 2017, Pages 90-96. ISSN: 2454-6410 (Online).
- [37] R.Suganya, M.Valan Rajkumar, P.Pushparani, "Simulation and Analysis of Boost Converter with MPPT for PV System using Chaos PSO Algorithm", International Journal of Emerging Technologies in Engineering Research (IJETER), Volume: 5, Issue: 11, November 2017, Pages 97-105. ISSN: 2454-6410 (Online).
- [38] P.Pushparani, M.Valan Rajkumar, R.Suganya, "Modeling and Analysis of Maximum Power Point Tracking for Photovoltaic System using Fuzzy Logic Controller", International Journal for Science and Advance Research in Technology (IJSART), Volume 3, Issue 11, November 2017, Pages 298-306. ISSN: 2395-1052 (Online)
- [39] R.Suganya, M.Valan Rajkumar, P.Pushparani, "Modeling and Analysis of Sinusoidal PWM Technique for CHB Multilevel Inverter for Photovoltaic System", International Journal for Science and Advance Research in Technology (IJSART), Volume 3, Issue 11, November 2017, Pages 307-315. ISSN: 2395-1052 (Online).
- [40] M.Sundaraperumal, M.Valan Rajkumar, D.Aravind, "Simulation and Analysis of APOD Pulse Width Modulation Technique for Z-Source Cascaded Multilevel Inverter for Photovoltaic System", International Journal for Science and Advance Research in Technology (IJSART), Volume 3, Issue 11, November 2017, Pages 816-824. ISSN: 2395-1052(Online).