

Prototype Model of Solar Charging Station

Bhavesh S. Bhopale¹, Shilpa Mahore², Abhilash R. Lomate³, Nilima R. Kharsan⁴

^{1,2,3} UG, ⁴Assistant Professor, Electronics and Telecommunication Engineering Department, DES'sCOET, Maharashtra, India.

Abstract – A solar power charging station is designed so that device can be charged outdoors and in an environmentally friendly way. This system converts solar energy to electricity and stores it in a battery bank. Microcontrollers prevents the batteries from being overcharged and prevent the system from being used when the batteries need charging. The intrinsic qualities of solar design afford it great utility for the following reason. Most developing countries are located in a remote region with optimal access to the sun rays, and not much else, most resources for fuel and energy that are available to developing countries can only be used by exploitation of the ecosystem, which leads to social decline, rising global independence of fossil fuels quickness the need for solar technology, which will increase competition and lower prices, solar system are relatively affordable and applicable to both home and villages, as household of industrialized nations are using solar more than ever before, within solar technologies, passive solar design is absolutely the ultimate in renewable energy for buildings, and can be coupled with solar panel to archived maximum comfort and sustainability. Many projects capitalizing on solar power have already been implemented in developing countries, and serve as encouraging results for many more to come. In this, the fomentation topics will be addressed to exemplify why solar power is best choice for sustainability and renewable energy in developing countries, and how completed project and on -going work in remote location may lay the foundation for standards of excellence in this field.

Index Terms – Charging station, solar energy, solar panel.

1. INTRODUCTION

In the past years, advancements in technology put devices in our pockets that we could not have even dreamed of years ago. However, these devices often have some drawbacks. One of the most pressing faults with phones, tablets, and laptop PCs is power. We have not yet been able to modify efficient energy sources to match the efficiency of our devices. In fact, many laptops can drain a standard battery from a full charge in a matter of a couple hours. This project is proposing a solution that will provide power to charge devices using power generated by solar energy.

2. SOLAR CHARGING STATION

The basic diagram for the solar charging stations for battery operated vehicle powered with the help of solar energy is shown in Fig.1. This charged battery with help of solar energy is used as a power source to drive electric vehicle. The battery at the solar charging stations is charging through classical charge controller or voltage regulator, In voltage regulator we

use LM371 for regulating voltage of battery and provide the over voltage protection .

Once set of batteries get discharged then old set of battery can be swapped with new charged batteries at charging station



Fig.1: Solar charging station

3. PURPOSE

Solar energy is a technology that has been increasing in popularity as it is further developed. Improvements in the panels and coatings as well as solar tracking have made solar energy more efficient. In this project, we will be utilizing solar energy to provide the supply for an outdoor charging station for devices. This project will further efforts to reduce our dependence on fossil fuels as a means to generate electricity. If our system can charge several devices without having external power from the national grid, it will be able to reduce some of the demand for energy resulting in less fuel used to generate the electricity over time. Solar energy continues to be researched and improved as an alternative source of energy. This project will aid global research efforts in helping protect our environment. Many are becoming aware of the effects of using oil and natural gas as a form of energy. These methods do create plenty of energy, however they are non-renewable and can cause harm to the Earth's atmosphere and ecosystems.

The objective of this project is to investigate the problem of providing an outdoor power source for charging devices in an environmentally friendly way to help reduce the demand of power from other methods. Our objective for this project will not only be to generate power from solar energy, but to also conduct research to improve the efficiency of solar panels. We will have to not only create this device but to optimize the project for sale as to create a cost-effective, economically friendly outdoor charging station for most electrical devices.

Research on other existing solar stations and patents was conducted by the team. From research of the existing designs, we found several points that can be improved. Three key areas that we saw were cost, efficiency, and complexity. Many will say the goal of electrical engineering is to design a cost effective, efficient, and easy to use device or product. We saw this idea as an ingenious use of a product that will not only generate solar energy, but shade users from the harmful effects of sunlight. The only downfall is the panels are stationary and smaller, which may result in less energy produced. Several examples of other solar charging station project, such as the University of Texas and University of Fairfax (Virginia), incorporated student design input, but ultimately were manufactured by solar companies and cost tens of thousands of dollars. This was another point we saw needed to be improved, so that the average homeowner would be able to own one of these devices. New York City implemented solar cell phone charging station prototypes in area parks. These charging stations were very ingenious as they claim to be able to charge multiple handheld devices at a time. Many Americans, especially those in New York City, use their cell phones or tablets a lot. However, cost of production of these charging stations was also costly as well as aimed solely for use with hand-held devices.

4. DESIGN CONSTRAINTS

This project will be required to take energy from the sun generated by solar panels and convert the energy to AC voltage, which will be able to power most electronic devices. The project must have a system to keep track of voltage levels and be able to protect the system from being overused or overcharged. It must also be able to keep track of its solar efficiency and be able to maintain the maximum amount of solar energy possible with the given environmental and weather conditions.

The biggest constraint to this project will be to maximize the solar efficiency to provide the most power to the system that can be generated by the solar panels. Weather and solar patterns must be accounted for when making all of the calculations for the efficiency and output of the solar panels. Climate factors, such as clouds, moisture, haze, dust, and smog will have a degrading effect on the output power of the station's panel array. Obtaining the greatest amount of sunlight throughout the day needs to be for optimum output. Different enhancements to the solar panels such as adding solar concentrators or a solar tracking device may be necessary adding to the cost. Research on these devices is currently being done so that we may incorporate them into the final product while we test the smaller components of the charging station.

Another constraint is to ensure the efficiency of the battery system which will be used to store the energy from the solar panels. Measures must be taken to prevent damaging the batteries by over charging them. Deep cycle batteries will be

used since they are able to handle charging and discharging very well. Ensuring proper safety regulations are met is another constraint dependent upon the electrical design, but more importantly is the overall structure of the station. Building and safety codes must be researched and implemented. A stand-alone structure poses significantly less risk regarding fire safety when proper precautions are taken during site preparation. We have not yet conducted research into the structure of the system, but upon the successful testing of the electronics, this will be a major focus of the final product. Not only do we want a successful product, but we want to make sure it is ethical and is safe for all.

5. SYSTEM DESIGN

From research on similar models and our knowledge from previous courses, we determined that this project would need to follow the example of any electrical system. It must have a source, a function, and an output. For our source, we will be using solar panels optimized with solar tracking. The system will contain the microcontroller to act as a charge controller and an inverter to convert from 12 Volt DC stored in the batteries to 110 Volt AC as the output.

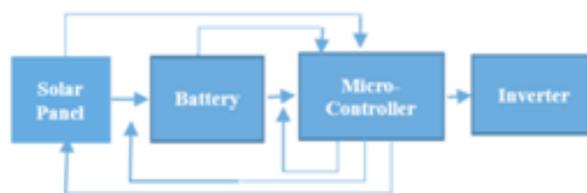


Fig. 2: Block Diagram of circuit

Figure 2 above shows a block diagram of the system. The solar tracker would be affixed to the solar panel and would relay information to the microcontroller. The microcontroller would then send a signal to the stepper motor to adjust the angle of the solar panels. The microcontroller would also read the battery level and determine if the battery needs to be stopped from charging or stopped from being utilized, if it has been fully used.

i) Solar Panel Technology

A solar panel is a group of electrically connected photovoltaic cells made of semiconductor materials, such as silicon, which is currently most common. When sunlight hits the cells, its energy is absorbed into the semiconductor material. This energy pushes other electrons loose that are then forced to flow in a certain direction by an electric field created in within the cells. This is the current for which is then drawn off of the panels by metal contacts on the top and bottom of the panels. The amount of current a PV panel produces has a direct correlation with the intensity of light the panel is absorbing. Figure 3 below shows a chart demonstrating the percentage lost based on the angle of incidence with the sun. Optimal

conditions for a solar panel are at 0° , or directly perpendicular to the sun's rays. Whereas the least optimal at 90° , which is parallel with the sun's rays.

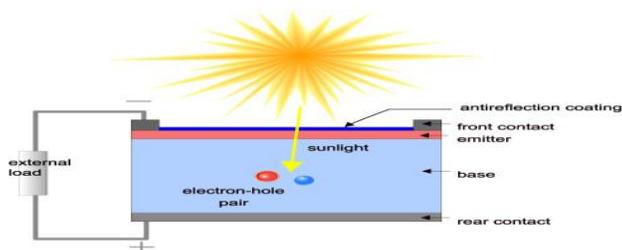


Fig. 3: Solar p-v cell

Multiple panels are electrically connected in either series to achieve a desired output voltage and/or in parallel to provide a desired current capability. A single solar cell produces only about $1/2$ (.5) of a volt. A typical 12 volt panel about 25 inches by 54 inches will contain 36 cells wired in series to produce about 17 volts peak output. If the solar panel can be configured for 24 volt output, there will be 72 cells, so the two 12 volt groups of 36 each can be wired in series, usually with a jumper, allowing the solar panel to output 24 volts. When under load, charging batteries for example, this voltage drops to 12 to 14 volts for a 12 volt configuration, resulting in 75 to 100 watts for a panel of this size.

The advantage of using a higher voltage output at the solar panel is that smaller wire sizes can be used to transfer the electric power from the solar panel array to the charge controller & batteries. This project was initially calculated utilizing two 12 volt, 100 Watts solar panels. Our decision to utilize two solar panels is being used based on the size of the panels and on the overall cost of the project. The size of each panel is 47 x 1.4 x 21.3 inches.

ii) Solar Tracker

One solution to the aforementioned constraints is to integrate a solar tracker circuit into the design, which will allow constant alignment towards the Sun and can potentially increase the production of electricity by the solar panels by up to 30%. An increase in output allows for a reduction in panel array size, which helps with overall cost and size of the team's design.

Solar trackers provide a precise tracking of the sun by tilting the solar panels towards the sunlight as it moves throughout the day and as well, the year. When sunlight strikes a solar panel, it comes in at an angle, called the angle of incidence. The normal angle to the cell is perpendicular to a PV cell's face and this normal is necessary to achieve the panel's proper alignment towards the sun. A tracking system can keep the angle of incidence within a certain margin and would be able to maximize the power generated. A tracker produces more power over a longer time than a stationary array with the same

number of modules. This additional output or "gain" can be quantified as a percentage of the output of the stationary array. These percentages will be tabulated after output measurements are taken once the tracker system is built and tested.

Trackers are categorized as either a single axis or dual axis system. Single axis accounts for horizontal east to west daily movement while dual axis integrates a vertical north and south seasonal tilt into the system. Single axis can provide a 15% to 30% increase of efficiency and solar power generated over a stationary panel while dual axis provides an additional 6%. The cost comparison for implementing a dual axis tilt tracker vs. single axis shows that dual axis will not be cost effective for this project because of the complexity and maintenance of the mechanics. Less components, in this case, will mean greater reliability and less down-time for maintenance issues. The tracking system will consist of 2 front panel LDRs (light dependent resistors), separated by a fixed plate, for tracking throughout the day and one fixed to the back of the solar panel for daily adjustment to its initial position, which is done through a control circuit and bi-directional DC stepper motor attached to a rotating shaft which will orient the panel towards the sun.

The comparison of the intensity of light upon each LDR and the difference between their output voltages will be what determines the orientation of the panel. The LDR's are made of a high resistance semiconductor material. This material absorbs photons from the light and some of their energy is transferred to the electrons. As the electrons break free, they gain sufficient energy to break free from the semiconductor lattice of the LDR and the overall resistance is lowered. This sensing from higher to lower density of sunlight is the driving force in the circuit design. The LDR's will be connected to a voltage divider circuit since any change in light density is proportional to the change in voltage across the LDR's.

iii) Motor

A bi-directional stepper motor has been chosen for this application because of their speed and torque yet low power and current consumption. In order to determine the amount of torque needed, we need to take two details into consideration. First, we must calculate the center of gravity point of the panel, then measure the distance from the pivot point, using the mass of the panels at the center of gravity, to give the torque required for normal operation.

The second detail is wind loading. There is also a frictional load situation, because many panel manufacturers prefer to design their equipment so the center of gravity is over the axis, such that the only torque needed is frictional and counters wind loading. So we will need to figure out how much force is needed to break frictional forces as well as wind forces when selecting our motor. The microcontroller will be programmed to run the motor to align the panels when there is a specified

degree of misalignment towards the normal, which will save in power consumption.

iv) Charge Controller

The Charge Controller is a switching device that can connect and disconnect the charger to the battery and it will take control over charging and to stop charging at the correct voltage. This will protect the batteries from damage from over-charging and regulate the power going from the solar panels to the batteries. A microcontroller in the circuit will read the level of the batteries and then cut off the source of the solar panels to the batteries, once it sees the battery is at the fully charged state. If this was not in place, the solar panels would keep feeding the batteries energy and the batteries would become overheated and damage the internal components.

The advantage to have a microcontroller in the system is that it will open a variety of features to add to the system. For example the microcontroller will be programmed to control and display the battery level of the system.

It will ensure that there is enough power to charge devices by displaying the gauge on a 7 segment LCD. If there is insufficient power, it will prevent the system from being used until sufficient power has been reached. The microcontroller will also be used in aiding solar efficiency by controlling the solar tracker, as mentioned previously.

v) Battery



Fig. 4: Lead Acidic Battery

The team has selected two deep cycle batteries to power the system. Each battery is a 12V and has a 35 Amp-hour capacity. Batteries for PV system batteries generally have to discharge a smaller current for a longer period of time, such as at night or during a power outage, while being charged during the day. Deep cycle batteries are designed for the purpose of discharging to a lower capacity, between 50% and 80%, than a conventional battery. The most commonly used deep-cycle batteries are lead-acid batteries and nickel-cadmium batteries, both of which have pros and cons. The deep-cycle batteries are able to be easily charged and discharged many times and can last for several years due to the thicker plate materials utilized. Batteries in PV systems can also be very dangerous because of the energy they store and the acidic electrolytes they contain,

so you'll need a well-ventilated, nonmetallic enclosure for them.

vi) Inverter

An inverter is an integral component in the solar station design. It will convert the DC voltage generated from the solar panels to an AC voltage. The team will be testing two designs by using special ICs or several pairs of transistors and diodes. An inverter can produce square wave, modified sine wave, pulsed sine wave, or sine wave depending on circuit design, demonstrated in Figure 2. The two dominant commercialized waveform types of inverters as of 2007 are modified sine wave and sine wave. There are two basic designs for producing household plug-in voltage from a lower voltage DC source, the first of which uses a switching boost converter to produce a higher-voltage DC and then converts to AC. The second method converts DC to AC at battery level and uses a line-frequency transformer to create the output voltage.

Inverter circuits can have a power loss of 10 % or even up to 20%. The team anticipates for a larger power inverted based on our maximum expected output and that the largest output will be required when two laptops are plugged into the system. Generally, laptops can draw anywhere between 65-90 Watts. For two laptops rated at 90 Watts, the inverter will be required to generate 180 Watts. From our calculation, we determined a 200 Watt inverter will suffice. At a 90% efficiency (10% power loss), the inverter will generate the 180 Watts we need.

6. CONCLUSION

The power sector is currently the greatest carbon emitter in, India, carbon Emissions from the transport sector are increasing rapidly as well. The control of carbon emissions from these two sectors is related to the successful achievement of carbon emission control objectives.

Thus, this study develops a model that combines solar power stations to reduce pollutant emissions from the power generation and transportation sectors. To verify its technical and economic feasibility. The PV power charging station that can meet the electricity Therefore, this model is acceptable from an economic point of view.

Moreover, this model displays a high pollutant emission reduction potential. According to the results of a comparison analysis with traditional gas-powered cars, the PV-EV model has pollutant reduction potentials of 99.8%, 99.7% and 100% for carbon dioxide, sulfur dioxide, and nitrogen oxide, respectively.

The findings from the sensitivity analysis also indicate that the capital cost of PV and interest rate have a relatively strong influence on COE, especially the interest rate. Given that the initial investment for this project is large and that charging facilities are not readily available in most cities. Thus, the roofs

of public buildings such as schools, rain corridor systems, and public parking lots are appropriate locations for PV-EV system construction.

7. FUTURE SCOPE

Petrol pumps require to be run 24x7, which huge amount of consumption take place. Other sources have their own limitation, like switchover time and dispenser pump shuts down ,power fluctuation, sudden power failure Petrol pumps, installed by conventional method are facing many problem because of above mention details. Now days, petrol pump is becoming a basic need in small town and village also. But in our country many villages and town are still present where no electricity, face erratic power supply or have grid supply for a minimal time period. Installing solar petrol pump can reduce monthly electricity bill, operational cost reduction on diesel generator, over a period of 25 years DG sets are 5 times as expensive as solar energy, accelerated depreciation benefits (80% first year,20% second year) to reduce your tax liability. Also a solar energy is a clean form energy offering reduction in carbon emission for a 1kw system a solar system can reduce carbon emission up to 1,5 tons/year. Hence due to above

discussion we can say solar Petrol Pump can be a best option in present scenario.

REFERENCES

- [1] Liu, Z.; Guan, D.; Crawford-Brown, D.; Zhang, Q.; He, K.; Liu, J. A low-carbon road map for China. *Nature* 2013, 500, 143–145.
- [2] Jiang, J.; Ye, B.; Ma, X. The Impact of International Greenhouse Gas Emission Constraints on Coal-fired Power Plant in China-Based on LCA Model. In Proceedings of the 14th International Conference on Digital Manufacturing and Automation (ICDMA), Kagawa, Japan, 4–7 August 2013; pp. 1468–1472. *Energies* 2015, 8, 13265–13283
- [3] Council, C.E. China Power Enterprise Statistical Data Analysis 2013; China Statistics Press: Beijing, China, 2014; pp. 35–43.
- [4] Shen, B.; Jian, W.; Li, M.; Li, J.; Price, L.; Zeng, L. China's approaches to financing sustainable development: Policies, practices and issues. *WIREs Energy Environ.* 2013, 2, 178–198.
- [5] Greenhouse Gas Emissions: Country Data 2010; International Energy Agency (IEA): New York, NY, USA, 2010; pp. 67–90.
- [6] Bureau, C.N.S. China Statistical Yearbook; China Statistics Press: Beijing, China, 2014. (In Chinese)
- [7] Chi, X.W. The analysis of carbon emissions from China's transportation sector. *J. Energy Strateg. Low Carbon Econ. Res.* 2012, 12, 56–62.
- [8] Bo, S.; Ghatikar, G.; Zeng, L.; Li, J.; Wikler, G.; Martin, P. The role of regulatory reforms, market changes, and technology development to make demand response a viable resource in meeting energy challenges. *Appl. Energy* 2014, 130, 814–823.