

Fabrication and Analysis of Chiller by Using Nanofluid Condenser

Saurabh R. Wadkar¹, Shubham V. Karadbhuj², Ashish Dhone³, Sachin K. Bhusari⁴, Roshansingh R. More⁵
^{1, 2, 3, 4} UG, ⁵Assistant Professor, Mechanical Engineering Department, DES'COET, Maharashtra, India.

Abstract – Now a day's man needs a sophisticated life with minimal economy and Branded materials made up of high précised components cost more which replicate the price of the machine/components. Low cost with high performance is the most expected from all categories of people. Industries also follow the same concept of cost cutting and moves to material selection which gives high economic turn over. The Nano component promises the above concept. They are various researches on Nano materials gave way to improve the quality of existing working equipment's. In this work the performance test of chiller unit by using Nano fluid (TiO₂) and water cooled condenser. The Water and Nano fluid (TiO₂) served as the working fluid with the concentrations by volume 2 g/L. The condenser is double tube type condenser the outer shell is made by the PVC pipe and inner tube is made by copper. It contains eight shells and one pass. The performance was checked by varying the flow rate of water and Nano fluid in the condenser.

Index Terms – Nano materials, Nano fluid (TiO₂-Titanium oxide), Water, Condenser, Chiller.

1. INTRODUCTION

Nano fluids are a new class of fluids engineered by dispersing nanometre-sized materials (nanoparticles, Nano fibres, nanotubes, nanowires, Nano rods, Nano sheet, or droplets) in base fluids. In other words, Nano fluids are Nano scale colloidal suspensions containing condensed nanomaterial. They are two-phase systems with one phase (solid phase) in another (liquid phase). Nano fluids have been found to possess enhanced thermo physical properties such as thermal conductivity, thermal diffusivity, viscosity, and convective heat transfer coefficients compared to those of base fluids like oil or water. In this paper, we will review the new progress in the methods for preparing stable Nano fluids and summarize the stability mechanisms. In recent years, Nano fluids have attracted more and more attention. The main driving force for Nano fluids research lies in a wide range of applications. Although some review articles involving the progress of Nano fluid investigation were published in the past several years (Wei Yu and Huaqing Xie, 2012; Adnan Hussein *et al.*, 2013; Akhtari *et al.*, 2013; Jaafar Albadr *et al.*, 2013; Sayantan Mukherjee and Somjit Paria, 2013; and Senthilraja and Vijayakumar, 2013), most of the reviews are concerned of the experimental and theoretical studies of the thermo physical properties or the convective heat transfer of Nano fluids. The purpose of this paper will focuses on the new preparation

methods and stability mechanisms, especially the new application trends for Nano fluids in addition to the heat transfer properties of Nano fluids. We will try to find some challenging issues that need to be solved for future research based on the review on these aspects of Nano fluids.

2. EXPERIMENTAL SETUP

The figure shows a schematic diagram of the experimental setup. It consists of double pipe condenser and double pipe evaporator. The condenser and evaporator consist of single pass and eight shells. The condenser and evaporator shell is made by PVC pipe, copper tube pass inside the shell. The counter flow arrangement is passed to the shell. The fluid will flow inside the shell it should be controlled by control valve and its flow measured by the flow meter. The pump is sucks the fluid in the tank and it passed to the shell. The refrigerant 134a is used as a refrigerant it will compressed by compressor, the refrigerant was flow with high temperature and pressure. The temperature and pressure should be measured by pressure sensor and temperature sensor.

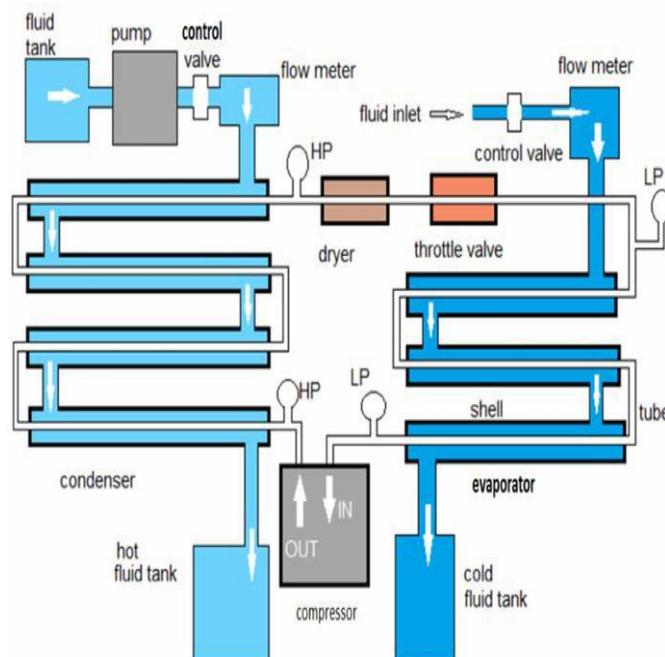


Figure 1: Layout of the Experimental Setup

The evaporator section water will flow inside the shell, due to the forced convection process it will release the heat to the refrigerant and water becomes cooled and it will store in the tank. The condenser unit TiO₂ and water based

Nano fluid is used to absorb the heat from the refrigerant. The inlet and outlet temperature of shell should be measured by temperature sensor.

3. PREPARATION OF NANO FLUID (TiO₂)

- Preparation of Nano lubricants is the first step in the experimental studies on Nano refrigerants. Nano fluids are not simply liquid solid mixtures. Special requirements are even, stable and durable suspension, negligible agglomeration of particles, and no chemical change of the fluid. Nano fluids can be prepared using single step or two step methods.
- In the present study two step procedures is used. Commercially available nanoparticles of Titanium oxide (manufactured by Sigma Aldrich) with average size <50 nm and having density 0.26 g/cc were used for the preparation of Nano lubricant. Mass fraction of nanoparticles in the nanoparticle lubricant mixtures is 0.06%.
- An ultrasonic vibrator (Micro clean 102, Oscar Ultrasonic) was used for the uniform dispersion of the nanoparticles and it took about 24 hours of agitation to achieve the same.
- Experimental observation shows that the stable dispersion of alumina nanoparticles can be kept for more than 3 days without coagulation or deposition.



Figure 2: Photographs of Nano Fluid: (a) Mixture of TiO₂ and Base Fluid in Conical Chamber, (b) Ultrasonic Vibrator Experiments

4. CONCLUSION

The performance test of chiller was conducted by using Nano fluid and water cooled condenser. TiO₂ Nano powder 100nm

was mixed with distilled water by using sonication process. The titanium oxide water based Nanofluid was properly stabilized. The experimental result shows the COP of chiller unit is increased when using Nano fluid compared to the base fluid. The flow rate is increases and performance also is increases.

REFERENCES

- [1] Sayantan Mukherjee and Somjit Paria (2013), "Preparation and Stability of Nanofluids—A Review", September- October.
- [2] Senthilraja S and Vijayakumar K C K (2013), *Analysis of Heat Transfer Coefficient of CuO/Water Nanofluid using Double Pipe Heat Exchanger*.
- [3] Tun-Ping Teng, Yi-Hsuan Hung, Tun-Chie Teng and Jun-Hong Chen (2011), "Performance Evaluation on an Air Cooled Heat Exchanger for Alumina Nanofluid Under Laminar Flow".
- [4] Wei Yu and Huaqing Xie (2012), "A Review on Nanofluids: Preparation, Stability Mechanisms and Applications", Article ID 435873.
- [5] Akhtari M, Haghshenasfard M and Talaie M R (2013), "Numerical and Experimental Investigation of Heat Transfer of α -Al₂O₃/ Water Nanofluid in Double Pipe and Shell and Tube Heat Exchangers, April 28.
- [6] Chandrasekara M and Suresh S (2011), "Experiments to Explore the Mechanisms of Heat Transfer in Nanocrystalline Alumina/Water Nanofluid Under Laminar and Turbulent Flow Conditions", June 15.
- [7] Jaafar Albadr, Satinder Tayal and Mushtaq Alasadi (2013), "Heat transfer Through Heat Exchanger Using Al₂O₃ Nanofluid at Different Concentrations.
- [8] Rajvanshi A K (2012), "Effect of Al₂O₃- Water Nanofluids in Convective Heat Transfer".

Authors



Mr. Saurabh R. Wadkar

He was born in Sarvoday Society, Tq. Dhamangaon Rly Dist. Amravati, Maharashtra, India. He completed his Diploma with First Class Division in Mechanical Engineering from L.A.M.I.T. Dhamangaon(Rly) and pursuing B.E Degree in Mechanical Engineering from Sant Gadge Baba Amravati University (SGBAU), Amravati, India, in 2014-2017.



Mr. Shubham V. Karadbhuj

He was born in Botoni Tq. Maregaon, Dist. Yavatmal, Maharashtra, India. He completed his 12th science with first Class Division and pursuing B.E Degree in Mechanical Engineering from Sant Gadge Baba Amravati University (SGBAU), Amravati, India, in 2014-2017.



Mr. Ashish Dhone

He was born in Anjansingi, Tq. Dhamangaon (Rly) Dist. Amravati, Maharashtra, India. He completed his Diploma with First Class Division in Mechanical Engineering from L.A.M.I.T. Dhamangaon (Rly) and pursuing B.E Degree in Mechanical Engineering from Sant Gadge Baba Amravati University (SGBAU), Amravati, India, in 2014-2017.



Mr. Sachin Bhusari

He was born in Pulgaon, Dist. Wardha, Maharashtra, India in. He completed his Diploma with First Class Division in Mechanical Engineering from Pulgaon Polithenic Pulgaon, and pursuing B.E Degree in Mechanical Engineering from Sant Gadge Baba Amravati University (SGBAU), Amravati, India, in 2014-2017.



Prof. Roshansing R. More

He completed his B.E. in Mechanical Engineering from PRMIT&R Collage of Engg. Badnera, Amravati. He also completed his M.E. in SSPACE, Wardha, Maharashtra, India.