

Automated Face Recognition System for Criminals via Dictionary Learning

Manisha D. Sakharkar

Bachelor Student, Computer Science & Engineering, DES's COET Dhamangaon Rly, India.

Tubasamer M. Pathan

Bachelor Student, Computer Science & Engineering, DES's COET Dhamangaon Rly, India.

Dipika D. Kalsait

Bachelor Student, Computer Science & Engineering, DES's COET Dhamangaon Rly, India.

Arati S. Kailuke

Bachelor Student, Computer Science & Engineering, DES's COET Dhamangaon Rly, India.

Abstract – The paper is mainly based on the face recognition of criminals from the images and videos. It allow the easy recognition without maintaining the paper record. We address the problem of robust face recognition with undersampled training data. Given only one or few training images available per subject, we present a novel recognition approach.

Index Terms – Undersampled Dictionary learning, Face recognition, Auxilary dictionary.

1. INTRODUCTION

Face recognition has been an active research topic, since it is difficult to recognize face images with illumination and expression variations as well as corruptions due to occlusion or disguise. A general solution is to collect a sufficient amount of training data in advance, so that the above intraclass variations can be properly handled. However, in practice, there is no guarantee that we get the satisfactory result. Moreover, for real-world applications, e.g. e-passport, driving license, or ID card identification, only one or very few face images of the subject of interest might be captured during the data acquisition stage. As a result, one would encounter the challenging task of undersampled face recognition.

Existing solutions to undersampled face recognition can be typically divided into two categories: patch-based methods and generic learning from external data. For patch-based methods, one can either extract discriminative information from patches collected by different images, or utilize/integrate the corresponding classification results for achieving recognition.

2. RELATED WORK

There are different techniques for face recognition. SRC and extended SRC is used in our work

2.1. SRC

The problem of automatically recognizing human faces from frontal views with varying expression and illumination, as well

as occlusion and disguise. The recognition problem as one of classifying among multiple linear regression models and argue that new theory from sparse signal representation offers the key to addressing this problem. Based on a sparse representation computed by l_1 -minimization, SRC propose a general classification algorithm for (image-based) object recognition. This new framework provides new insights into two crucial issues in face recognition: feature extraction and robustness to occlusion. For feature extraction, show that if sparsity in the recognition problem is properly harnessed, the choice of features is no longer critical. What is critical, however, is whether the number of features is sufficiently large and whether the sparse representation is correctly computed. Unconventional features such as downsampled images and random projections perform just as well as conventional features such as eigen faces and Laplacian faces, as long as the dimension of the feature space surpasses certain threshold, predicted by the theory of sparse representation. This framework can handle errors due to occlusion and corruption uniformly by exploiting the fact that these errors are often sparse with respect to the standard (pixel) basis. The theory of sparse representation helps predict how much occlusion the recognition algorithm can handle and how to choose the training images to maximize robustness to occlusion.

2.2. EXTENDED SRC

Sparse Representation-Based Classification (SRC) is a face recognition breakthrough in recent years which has successfully addressed the recognition problem with sufficient training images of each gallery subject. In this extend SRC to applications where there are very few, or even a single, training images per subject. Assuming that the intraclass variations of one subject can be approximated by a sparse linear combination of those of other subjects, Extended Sparse Representation-Based Classifier (ESRC) applies an auxiliary intraclass variant

dictionary to represent the possible variation between the training and testing images. The dictionary atoms typically represent intraclass sample differences computed from either the gallery faces themselves or the generic faces that are outside the gallery. The superior results of ESRC suggest that if the dictionary is properly constructed, SRC algorithms can generalize well to the large-scale face recognition problem, even with a single training image per class.

3. PORPOSED MODELLING

In this paper we are providing the techniques to perform face recognition from images as well as videos. With the video first we have to perform the detection of faces from it and then face recognition similar to that of recognition from images.

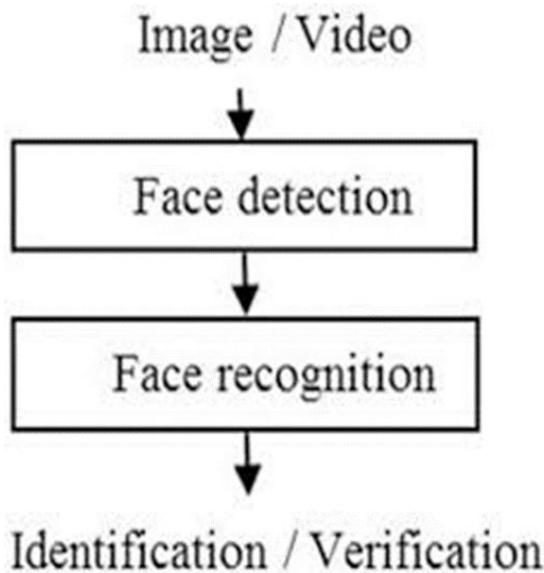


Fig.3.1 Proposed Model.

From the figure given above we can give the image or video as input. After giving the input as image and video the detection operation is performed. In detection the actual faces from the image or videos are detected, and background is deleted. After the detection the actual face recognition is performed. For the recognition we use the face recognition via robust auxiliary dictionary, where auxiliary dictionary act as a supportive for face recognition. The actual face recognition is shown in the below figure.

The actual face recognition process is shown in the above figure. Firstly the query image is given, from that query image we have to remove the weight then we get the image of person without weight. With this query image we have to search the identical image from the gallery, which contain the neutral image of person, if we get the same then select that one and for any intraclass variation make use of auxiliary dictionary. To

select the best one from the auxiliary dictionary we use the sparse coefficient, the one which is having the highest value of sparse coefficient we have to select that one. And finally the neutral image from gallery and the intraclass variation from auxiliary dictionary are combined to produce the final required image as that of the query image. If the neutral image of the query image is not present in the gallery then the final result will be produce that the person is not matched or recognized.

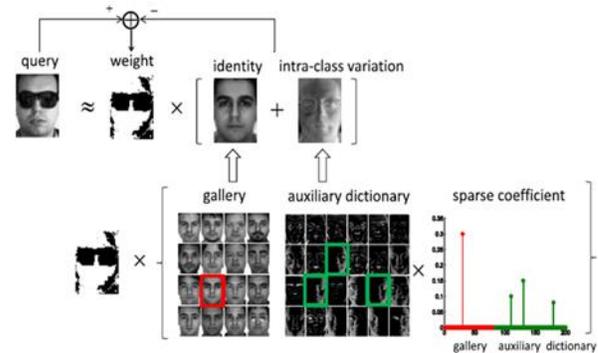


Fig.3.2 Face recognition via robust auxiliary dictionary learning.

Suppose for example, let us consider that we have 20 persons, so the neutral image of face of this 20 persons we have to store in our gallery and out of 20 let us consider 10 persons face images with different intraclass variations such as illumination, expression, occlusion, etc. have to be save or store in the auxiliary dictionary that will act as a supportive for face recognition.

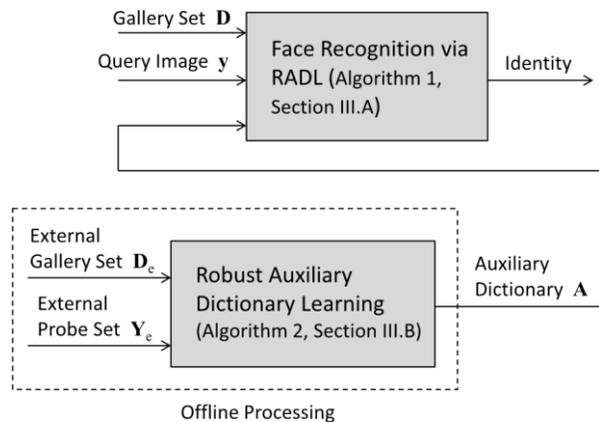


Fig. 3.3 Flowchart for our proposed framework for undersampled face recognition.

4. RESULTS AND DISCUSSIONS

Thus the table given below shows the working of different methods and compare all of them with our method. In our method we are using undersampled gallery set. It is using the dictionary learning and it is also robust to occlusion. While the

other methods are lacking some of these things which leads to a problem in their working. This three important things play a very important role in the efficient working of our method. As our method required the undersampled gallery set, so there is no need to collect much data which reduces the storage problem and it uses the auxiliary dictionary as a supportive and it deals with the occlusion also. That's why our method is efficient one.

	Undersampled Gallery Set	Dictionary Learning	Robustness to Occlusion
SRC [14]	×	×	×
RSC [12]	×	×	✓
LRSI [15]	×	×	✓
ESRC [9]	✓	×	×
ADL [10]	✓	✓	×
SVDL [11]	✓	✓	×
Ours	✓	✓	✓

Table 4.1 Comparison of our method with other.

5. CONCLUSION

We presented a novel method for undersampled face recognition. We advocated the learning of an auxiliary dictionary from external data for modelling intraclass variation. As a result, the proposed model allows one to recognize occluded face images, or those with illumination and expressions variations, only one or few gallery images per subject are available during training.

REFERENCES

- [1] T. Ahonen, A. Hadid, and M. Pietikainen, "Face description with local binary patterns: Application to face recognition," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 28, no. 12, pp. 2037–2041, Dec. 2006.
- [2] J. Zou, Q. Ji, and G. Nagy, "A comparative study of local matching approach for face recognition," *IEEE Trans. Image Process.*, vol. 16, no. 10, pp. 2617–2628, Oct. 2007.
- [3] J. Lu, Y.-P. Tan, and G. Wang, "Discriminative multimanifold analysis for face recognition from a single training sample per person," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 35, no. 1, pp. 39–51, Jan. 2013.
- [4] R. Kumar, A. Banerjee, B. C. Vemuri, and H. Pfister, "Maximizing all margins: Pushing face recognition with kernel plurality," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, Nov. 2011, pp. 2375–2382.
- [5] Y. Su, S. Shan, X. Chen, and W. Gao, "Adaptive generic learning for face recognition from a single sample per person," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2010, pp. 2699–2706.
- [6] M. Kan, S. Shan, Y. Su, D. Xu, and X. Chen, "Adaptive discriminant learning for face recognition," *Pattern Recognit.*, vol. 46, no. 9, pp. 2497–2509, Sep. 2013.
- [7] W. Deng, J. Hu, and J. Guo, "Extended SRC: Undersampled face recognition via intraclass variant dictionary," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 34, no. 9, pp. 1864–1870, Sep. 2012.
- [8] C.-P. Wei and Y.-C. F. Wang, "Learning auxiliary dictionaries for undersampled face recognition," in *Proc. IEEE Int. Conf. Multimedia Expo (ICME)*, Jul. 2013, pp. 1–6.
- [9] M. Yang, L. Van Gool, and L. Zhang, "Sparse variation dictionary learning for face recognition with a single training sample per person," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, Dec. 2013, pp. 689–696.

- [10] M. Yang, L. Zhang, J. Yang, and D. Zhang, "Robust sparse coding for face recognition," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2011, pp. 625–632.
- [11] M. Aharon, M. Elad, and A. Bruckstein, "K-SVD: An algorithm for designing overcomplete dictionaries for sparse representation," *IEEE Trans. Signal Process.*, vol. 54, no. 11, pp. 4311–4322, Nov. 2006.
- [12] J. Wright, A. Y. Yang, A. Ganesh, S. S. Sastry, and Y. Ma, "Robust face recognition via sparse representation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 31, no. 2, pp. 210–227, Feb. 2009.
- [13] C.-F. Chen, C.-P. Wei, and Y.-C. F. Wang, "Low-rank matrix recovery with structural incoherence for robust face recognition," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2012, pp. 2618–2625.
- [14] M. Yang, L. Zhang, J. Yang, and D. Zhang, "Regularized robust coding for face recognition," *IEEE Trans. Image Process.*, vol. 22, no. 5, pp. 1753–1766, May 2013.

Authors



Manisha D. Sakharkar

Final year Computer Science & Engineering student from DES's COET Dhamangaon Rly, India.



Tubasamer M. Pathan

Final year Computer Science & Engineering student from DES's COET Dhamangaon Rly, India.



Dipika D. Kalsait

Final year Computer Science & Engineering student from DES's COET Dhamangaon Rly, India.



Arati S. Kailuke

Final year Computer Science & Engineering student from DES's COET Dhamangaon Rly, India.